

State of California  
AIR RESOURCES BOARD

EXECUTIVE ORDER U-R-13-11  
Relating to Certification of New Heavy-Duty Off-Road Equipment Engines

DEUTZ CORPORATION GmbH

Pursuant to the authority vested in the Air Resources Board by Sections 43000.5, 43013 and 43018 of the Health and Safety Code; and

Pursuant to the authority vested in the undersigned by Sections 39515 and 39516 of the Health and Safety Code and Executive Order G-45-9;

IT IS ORDERED AND RESOLVED: That the following Deutz Corporation GmbH 1998 model-year engines, with rated power between 175 and 750 horsepower, and exhaust emission control systems are certified as described below for use in heavy-duty off-road equipment:

Typical Equipment Usage: Pump, Generator Set, Air Conditioner

Fuel Type: Diesel

<u>Engine Family</u>	<u>Displacement Liters (Cubic Inches)</u>	<u>Exhaust Emission Control Systems and Special Features</u>
WDZXL15.9002	11.9/15.87 (726/968)	Turbocharger Smoke Puff Limiter

Engine models and codes are listed on attachments. Production engines shall be in all material respects the same as those for which certification is granted.

The total hydrocarbons (THC), carbon monoxide (CO), nitrogen oxides (NOx), and particulate matter (PM) certification exhaust emission standards, in grams per brake horsepower-hour (g/bhp-hr), and the opacity of smoke emission standards, in percent (%), during acceleration (Accel), lugging (Lug), and peak (Peak) modes, for this engine family are (Title 13, California Code of Regulations, Section 2423):

<u>Exhaust Emissions (g/bhp-hr)</u>				<u>Smoke Opacity (%)</u>		
<u>THC</u>	<u>CO</u>	<u>NOx</u>	<u>PM</u>	<u>Accel</u>	<u>Lug</u>	<u>Peak</u>
1.0	8.5	6.9	0.4	20	15	50

The THC, CO, NOx and PM exhaust emission certification values, in g/bhp-hr, and the opacity of smoke emission certification values, in percent (%), for this engine family are:

<u>Exhaust Emissions (g/bhp-hr)</u>				<u>Smoke Opacity (%)</u>		
<u>THC</u>	<u>CO</u>	<u>NOx</u>	<u>PM</u>	<u>Accel</u>	<u>Lug</u>	<u>Peak</u>
0.3	0.7	6.6	0.1	6	2	17

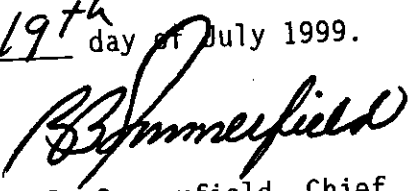
BE IT FURTHER RESOLVED: That the listed engine models comply with the "Exhaust Emission Standards and Test Procedures--Heavy-Duty Off-Road Diesel Cycle Engines" (Title 13, California Code of Regulations, Section 2423) for the aforementioned model year.

BE IT FURTHER RESOLVED: That the listed engine models also comply with the "Emission Control Labels--1996 and Later Heavy-Duty Off-Road Diesel Cycle Engines" (Title 13, California Code of Regulations, Section 2424) for the aforementioned model year.

BE IT FURTHER RESOLVED: That for the listed engine models, the manufacturer has submitted the materials to demonstrate certification compliance with the Board's emission control system warranty provisions (Title 13, California Code of Regulations, Section 2425 et seq.).

Engines certified under this Executive Order must conform to all applicable California emission regulations.

Executed at El Monte, California this 19<sup>th</sup> day of July 1999.

  
R. B. Summerfield, Chief  
Mobile Source Operations Division

Engine type	Engine code	Nominal power 45%	Nominal speed ±50rpm	Mean effective pressure at nominal power	Injection rate at nominal power ±5mm <sup>3</sup>	Peak torque ±5%	Mean effective pressure at peak torque	Injection rate at peak torque ±5mm <sup>3</sup>	Speed at peak torque ±100rpm	Low idle (+300 rpm, dep. on engine applic.)	High idle (+300 rpm, dep. on engine applic.)
		kW	rpm	bar	mm <sup>3</sup> /stroke	Nm	bar	mm <sup>3</sup> /stroke	rpm	rpm	rpm
1	BF6M1015 C2403	240	2100	11.52	285	530	16.15	344	1200	550	2180
2	BF6M1015 C2313	231	2100	11.09	275	1473	15.55	331	1200	550	2180
3	BF6M1015 C2233	223	2100	10.70	265	1422	15.01	320	1200	550	2180
4	BF6M1015 C2143	214	2100	10.27	255	1364	14.40	307	1200	550	2180
5	BF6M1015 C2404	240	1900	12.73	280	1530	16.15	344	1200	550	1970
6	BF6M1015 C2314	231	1900	12.25	281	1473	15.55	331	1200	550	1970
7	BF6M1015 C2234	223	1900	11.83	273	1422	15.01	320	1200	550	1970
8	BF6M1015 C2144	214	1900	11.35	265	1364	14.40	307	1200	550	1970
9	BF6M1015 C2281	228	1800	12.77	285	1468	15.50	330	1200	550	1870
10	BF6M1015 C2201	220	1800	12.32	275	1417	14.96	319	1200	550	1870
11	BF6M1015 C2111	211	1800	11.81	268	1359	14.35	309	1200	550	1870
12	BF6M1015 C2031	203	1800	11.37	257	1307	13.80	294	1200	550	1870
13	BF6M1015 D2401	240	2100	11.52	285	n.a.	n.a.	n.a.	n.a.	n.a.	n.a.
14	BF6M1015 D2501	250	1800	14.00	309	n.a.	n.a.	n.a.	n.a.	n.a.	n.a.
15	BF6M1015 D2281	228	1800	12.77	285	n.a.	n.a.	n.a.	n.a.	n.a.	n.a.
16	BF6M1015 D2111	211	1800	11.81	268	n.a.	n.a.	n.a.	n.a.	n.a.	n.a.
17	BF6M1015 C290	290	2100	10.44	290	2040	16.15	355	1200	550	2180
18	BF6M1015 C280	280	2100	10.08	280	1984	15.55	342	1200	550	2180
19	BF6M1015 C270	270	2100	9.72	270	1896	15.01	330	1200	550	2180
20	BF6M1015 C260	260	2100	9.36	260	1819	14.40	317	1200	550	2180
21	BF6M1015 C2801	280	1900	11.54	290	2040	16.15	355	1200	550	1970
22	BF6M1015 C2701	270	1900	11.14	280	1964	15.55	342	1200	550	1970
23	BF6M1015 C2701	270	1900	10.74	270	1896	15.01	330	1200	550	1970
24	BF6M1015 C2601	260	1900	10.34	260	1819	14.40	317	1200	550	1970
25	BF6M1015 C278	278	1800	11.59	290	1960	15.52	341	1200	550	1870
26	BF6M1015 C265	265	1800	11.13	280	1890	14.97	329	1200	550	1870
27	BF6M1015 C255	255	1800	10.71	270	1812	14.35	316	1200	550	1870
28	BF6M1015 C245	245	1800	10.33	262	1743	13.80	304	1200	550	1870
29	BF6M1015 D290	290	2100	10.44	290	n.a.	n.a.	n.a.	n.a.	n.a.	n.a.

VDE 16.2 GDA RA